

02-25-00

A

02/24/00  
U.S. PTO

# UTILITY PATENT APPLICATION TRANSMITTAL

## (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
2204/A12Total Pages in this Submission  
32**TO THE ASSISTANT COMMISSIONER FOR PATENTS**

Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**APPARATUS AND METHOD FOR BINDING A CONNECTION-ORIENTED CLIENT TO A COMMUNICATION CHANNEL**

JC511 U.S. PTO  
09/512576

02/24/00

and invented by:

Richard Crump

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

Continuation    Divisional    Continuation-in-part (CIP)   of prior application No.: \_\_\_\_\_

Which is a:

Continuation    Divisional    Continuation-in-part (CIP)   of prior application No.: \_\_\_\_\_

Which is a:

Continuation    Divisional    Continuation-in-part (CIP)   of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1.  Filing fee as calculated and transmitted as described below
2.  Specification having 20 pages and including the following:
  - a.  Descriptive Title of the Invention
  - b.  Cross References to Related Applications (*if applicable*)
  - c.  Statement Regarding Federally-sponsored Research/Development (*if applicable*)
  - d.  Reference to Microfiche Appendix (*if applicable*)
  - e.  Background of the Invention
  - f.  Brief Summary of the Invention
  - g.  Brief Description of the Drawings (*if drawings filed*)
  - h.  Detailed Description
  - i.  Claim(s) as Classified Below
  - j.  Abstract of the Disclosure

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
2204/A12

Total Pages in this Submission  
32

## Application Elements (Continued)

3.  Drawing(s) (when necessary as prescribed by 35 USC 113)
  - a.  Formal Number of Sheets \_\_\_\_\_
  - b.  Informal Number of Sheets 5
4.  Oath or Declaration
  - a.  Newly executed (*original or copy*)  Unexecuted
  - b.  Copy from a prior application (37 CFR 1.63(d)) (*for continuation/divisional application only*)
  - c.  With Power of Attorney  Without Power of Attorney
  - d.  DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5.  Incorporation By Reference (*usable if Box 4b is checked*)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6.  Computer Program in Microfiche (*Appendix*)
7.  Nucleotide and/or Amino Acid Sequence Submission (*if applicable, all must be included*)
  - a.  Paper Copy
  - b.  Computer Readable Copy (*identical to computer copy*)
  - c.  Statement Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

8.  Assignment Papers (*cover sheet & document(s)*)
9.  37 CFR 3.73(B) Statement (*when there is an assignee*)
10.  English Translation Document (*if applicable*)
11.  Information Disclosure Statement/PTO-1449  Copies of IDS Citations
12.  Preliminary Amendment
13.  Acknowledgment postcard
14.  Certificate of Mailing  
 First Class  Express Mail (*Specify Label No.:* EL361716631US)

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
2204/A12

Total Pages in this Submission  
32

## Accompanying Application Parts (Continued)


15.  Certified Copy of Priority Document(s) (*if foreign priority is claimed*)
16.  Additional Enclosures (*please identify below*):

## Fee Calculation and Transmittal

### CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	13	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	6	- 3 =	3	x \$78.00	\$234.00
Multiple Dependent Claims (check if applicable)	<input type="checkbox"/>				\$0.00
				BASIC FEE	\$690.00
OTHER FEE (specify purpose)					\$0.00
				TOTAL FILING FEE	\$924.00

- A check in the amount of \_\_\_\_\_ to cover the filing fee is enclosed.
- The Commissioner is hereby authorized to charge and credit Deposit Account No. \_\_\_\_\_ as described below. A duplicate copy of this sheet is enclosed.
- Charge the amount of \_\_\_\_\_ as filing fee.
- Credit any overpayment.
- Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

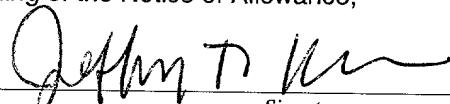

Signature

Jeffrey T. Klayman, Reg. No. 39,250  
BROMBERG & SUNSTEIN LLP  
125 Summer Street  
Boston, MA 02110  
(617) 443-9292

Dated: February 24, 2000

CC:

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR UNITED STATES PATENT

FOR

**APPARATUS AND METHOD FOR BINDING A CONNECTION-ORIENTED  
CLIENT TO A COMMUNICATION CHANNEL**

Inventor:

**Richard Crump**  
295 Beacon Street  
Boston, MA 02117

Attorney Docket: 2204/A12 (BA375)

Attorneys:

BROMBERG & SUNSTEIN LLP  
125 Summer Street  
Boston, MA 02110  
(617) 443-9292

-1-

## APPARATUS AND METHOD FOR BINDING A CONNECTION-ORIENTED CLIENT TO A COMMUNICATION CHANNEL

### PRIORITY

5

The present patent application claims priority from the commonly-owned United States Provisional Patent Application No. 60/121,661 entitled CORRELATING DATA STREAMS OF DIFFERENT PROTOCOLS, which was filed on February 25, 1999 in the names of Richard Crump, Janet Doong, Okoziem Allen, and Debra Guttormsen, and is hereby incorporated herein by reference in its entirety.

10

0

15

5

20

0

### CROSS-REFERENCE TO RELATED APPLICATIONS

The present patent application may be related to the following commonly-owned United States patent applications, which are hereby incorporated herein by reference in their entireties:

U.S. Patent Application No. (2204/169) entitled CORRELATING DATA STREAMS OF DIFFERENT PROTOCOLS, which was filed in the names of Richard Crump and Janet Doong on even date herewith;

U.S. Patent Application No. (2204/A13) entitled MANAGING ADDRESSES IN A COMMUNICATION SYSTEM, which was filed in the names of Richard Crump and Debra Guttormsen on even date herewith; and

U.S. Patent Application No. (2204/A14) entitled ENCODING ADDRESSES IN A COMMUNICATION SYSTEM, which was filed in the names of Okoziem Allen and Richard Crump on even date herewith.

### FIELD OF THE INVENTION

25

The present invention relates generally to communication systems, and more particularly to binding a connection-oriented client to a communication channel.

30

## BACKGROUND OF THE INVENTION

In today's information age, communication networks are often used for  
5 interconnecting various network devices. Each network device supports various  
applications that communicate using various protocols. For convenience, an application in  
a network device is referred to hereinafter as a "client."

In order for a client to communicate over the communication network, the client  
requires a communication channel. The network device supports various communication  
10 channels. The client binds to a communication channel in order to communicate over the  
communication channel.

In a prior art embodiment of the invention, the network device includes binding  
logic that binds clients to communication channels. The binding logic is logically situated  
between the client logic and the X.25 logic within the network device. The binding logic  
binds all clients having the same destination to a shared set of communication channels.  
15 This type of binding does not work well for connection-oriented clients.

## SUMMARY OF THE INVENTION

In accordance with one aspect of the invention, each connection-oriented client is  
bound to its own communication channel.

In one embodiment of the invention, each connection-oriented client is bound to its  
own X.25 logical channel. The X.25 logical channel includes a single virtual circuit.

## BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects and advantages of the invention will be  
30 appreciated more fully from the following further description thereof with reference to the  
accompanying drawings wherein:

FIG. 1 is a block diagram showing the relationship between the client logic, the  
binding logic, and the X.25 logic in an exemplary embodiment of the present invention;

FIG. 2 is an event flow diagram showing the event flow for initiating a binding by the client logic in an exemplary embodiment of the present invention;

FIG. 3 is a logic flow diagram showing exemplary logic for initiating a binding by the client logic in an exemplary embodiment of the present invention;

5 FIG. 4 is an event flow diagram showing the event flow for initiating a binding by the X.25 logic in an exemplary embodiment of the present invention; and

FIG. 5 is a logic flow diagram showing exemplary logic for initiating a binding by the X.25 logic in an exemplary embodiment of the present invention.

10  
15  
20  
25

## DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

In an embodiment of the invention, the network device includes client logic supporting a number of clients, binding logic, and driver logic supporting various types of communication channels. The binding logic is logically situated between the client logic and the driver logic within the network device, and in particular between the client logic and the X.25 logic. The binding logic sets up bindings between clients and communication channels. The binding logic provides a common interface to the clients for all communication channels, and thus the clients do not require any logic that is specific to a particular type of communication channel.

In one embodiment of the invention, the communication channels are X.25 logical channels. X.25 is a common networking protocol that includes a frame-based link layer and a packet-based network layer. X.25 uses virtual circuits in order to multiplex multiple communication streams over a single link layer connection. An X.25 logical channel may include one or more virtual circuits. In such an embodiment, the driver logic includes X.25 logic for managing X.25 logical channels.

30 FIG. 1 is a block diagram 100 showing the relationship between the client logic 102, the binding logic 104, and the X.25 logic 106 in an exemplary embodiment of the present invention. The binding logic 104 is logically situated between the client logic 102 and the X.25 logic 106. The binding logic sets up bindings between clients and X.25 logical channels. Such bindings may be initiated by the client logic 102, for example,

upon requesting an X.25 communication channel, or by the X.25 logic 106, for example, upon receiving call over the X.25 network.

When a connection-oriented client binds to an X.25 logical channel, the binding logic 104 binds the connection-oriented client to its own X.25 logical channel. The X.25 logical channel includes a single virtual circuit, and is referenced by an X.25 channel identifier. No other clients utilize the communication channel.

In order to simplify the design of the client logic 102, the client logic 102 creates connect logic for each communication channel to which it binds. The connect logic is a separate operating system process from the client logic 102 that is referenced by a connect logic identifier. The connect logic maintains a list of available communication channels, which, for a connection-oriented client, will contain at most one communication channel. Data is exchanged between the client logic 102 and the connect logic using a message passing scheme based upon the connect logic identifier.

The binding logic 104 actually sets up a binding between the connect logic created by the client logic 102 and an X.25 logical channel created by the X.25 logic 106. Data is exchanged between the connect logic and the X.25 logical channel using a message passing scheme based upon the connect logic identifier and the X.25 channel identifier.

#### INITIATING A BINDING BY THE CLIENT LOGIC

The network device may permit a connection-oriented client 102 to initiate a connection. In this case, when the client 102 requests a communication channel, the communication channel is created, and the client 102 is bound to the communication channel.

When the connection-oriented client logic 102 requires an X.25 logical channel, the client logic 102 creates connect logic for the connection, and sends a channel request message to the binding logic 104. The channel request message includes a calling address, a called address, a connect type indicating that a connection-oriented connection is requested, the connect logic identifier identifying the connect logic, and an X.25 channel identifier equal to zero indicating that a new X.25 logical channel is requested.

-5-

Upon receiving the channel request message from the client logic 102, the binding logic 104 sends a channel request message to the X.25 logic 106. The channel request message includes the calling address, the called address, the connect type, and the connect logic identifier.

5 Upon receiving the channel request message from the binding logic 104, the X.25 logic 106 creates an X.25 channel having an X.25 channel identifier, and sends a channel available message to the binding logic 104 indicating that the X.25 channel was created. The channel available message includes the X.25 channel identifier to identify the X.25 channel, and also includes the connect logic identifier so that the binding logic 104 can correlate the X.25 channel with the connect logic.

10 Upon receiving the channel available message from the X.25 logic 106, the binding logic 104 updates its binding database to bind the connect logic identified by the connect logic identifier and the X.25 channel identified by the X.25 channel identifier, and sends a startup message to the connect logic including the X.25 channel identifier. The startup message confirms that the binding was successfully created.

15 Upon receiving the startup message from the binding logic 104, the connect logic updates its list of available communication channels to include the newly created X.25 channel.

20 Thereafter, when the client logic 102 needs to send data over the communication channel, the client logic 102 forwards the data to the connect logic. As part of its normal processing, the connect logic searches its list of available communication channels for a usable channel. Since there is only one communication channel for the connection-oriented client (i.e., the X.25 channel that was created by the X.25 logic 106), the connect logic forwards the data to the X.25 channel.

25 Similarly, when data is received over the X.25 channel, the data is forwarded to the connect logic, which in turn forwards the data to the client logic 102.

FIG. 2 shows the various event flows when a binding is initiated by the client logic 102. For convenience, an event flow in which an entity is created is shown by a dashed arrow. An event flow involving a message exchange is shown by a solid arrow. The event sequence number is shown in parentheses.

10  
15  
20  
25  
30

When the connection-oriented client logic 102 requires an X.25 logical channel, the client logic 102 creates connect logic 108 for the connection in step (1), and sends a channel request message to the binding logic 104 in step (2). The channel request message includes a calling address, a called address, a connect type indicating that a connection-oriented connection is requested, the connect logic identifier identifying the connect logic 108, and an X.25 channel identifier equal to zero indicating that a new X.25 logical channel is requested.

Upon receiving the channel request message from the client logic 102 in step (2), the binding logic 104 sends a channel request message to the X.25 logic 106 in step (3). The channel request message includes the calling address, the called address, the connect type, and the connect logic identifier.

Upon receiving the channel request message from the binding logic 104 in step (3), the X.25 logic 106 creates an X.25 channel 110 having an X.25 channel identifier in step (4), and sends a channel available message to the binding logic 104 indicating that the X.25 channel was created in step (5). The channel available message includes the X.25 channel identifier to identify the X.25 channel 110, and also includes the connect logic identifier so that the binding logic 104 can correlate the X.25 channel 110 with the connect logic 108.

Upon receiving the channel available message from the X.25 logic 106 in step (5), the binding logic 104 updates its binding database to bind the connect logic 108 identified by the connect logic identifier and the X.25 channel 110 identified by the X.25 channel identifier, and sends a startup message to the connect logic 108 including the X.25 channel identifier in step (6). The startup message confirms that the binding was successfully created.

Upon receiving the startup message from the binding logic 104 in step (6), the connect logic 108 updates its list of available communication channels to include the newly created X.25 channel 110.

Thereafter, when the client logic 102 needs to send data over the communication channel, the client logic 102 forwards the data to the connect logic 108 in step (7). As part of its normal processing, the connect logic 108 searches its list of available communication

channels for a usable channel. Since there is only one communication channel for the connection-oriented client (i.e., the X.25 channel 110 that was created by the X.25 logic 106), the connect logic 108 forwards the data to the X.25 channel 110 in step (8).

Similarly, when data is received over the X.25 channel, the data is forwarded to the connect logic, which in turn forwards the data to the client logic 102. This event flow is not shown in FIG. 2.

FIG. 3 is a logic flow diagram showing exemplary logic 300 for initiating a binding by the client logic 102. Beginning at step 302, the client logic 102 creates connect logic having a connect logic identifier, in step 304, and sends a channel request message to the binding logic 104, in step 306. The channel request message includes a calling address, a called address, a connect type indicating that a connection-oriented connection is requested, the connect logic identifier identifying the connect logic, and an X.25 channel identifier equal to zero indicating that a new X.25 logical channel is requested.

Upon receiving the channel request message from the client logic 102, the binding logic 104 sends a channel request message to the X.25 logic 106, in step 308. The channel request message includes the calling address, the called address, the connect type, and the connect logic identifier.

Upon receiving the channel request message from the binding logic 104, the X.25 logic 106 creates an X.25 channel identifier having an X.25 channel identifier, in step 310, and sends a channel available message to the binding logic 104 indicating that the X.25 channel was created, in step 312. The channel available message includes the X.25 channel identifier to identify the X.25 channel, and also includes the connect logic identifier so that the binding logic 104 can correlate the X.25 channel with the connect logic.

Upon receiving the channel available message from the X.25 logic 106, the binding logic 104 updates its binding database to bind the connect logic identified by the connect logic identifier and the X.25 channel identified by the X.25 channel identifier, in step 314, and sends a startup message to the connect logic including the X.25 channel identifier, in step 316. The startup message confirms that the binding was successfully created.

Upon receiving the startup message from the binding logic 104, the connect logic updates its list of available communication channels to include the newly created X.25 channel, in step 318. The logic 300 terminates in step 399.

## 5 INITIATING A BINDING BY THE X.25 LOGIC

The network device may be configured to receive calls that are initiated by other network devices. In this case, a call is only accepted if there is a client 102 that is available to be bound to the connection. Thus, a connection-oriented client 102 may make itself available for an incoming call by registering with the X.25 logic 106. The client 102 may register to receive calls from a specific address or from any address.

When the X.25 logic 106 receives a call including a calling address and a called address, the X.25 logic 106 creates an X.25 channel having an X.25 channel identifier. The X.25 logic 106 then sends a new channel message to the client logic 102, and also sends a channel available message to the binding logic 104. The new channel message includes the calling address, the called address, and the X.25 channel identifier. The channel available message includes the X.25 channel identifier, and also includes a connect logic identifier equal to zero to indicate that there is no connect logic associated with the X.25 channel.

Upon receiving the channel available message from the X.25 logic 106, the binding logic 104 updates its binding database to include the newly created X.25 channel.

Upon receiving the new channel message from the X.25 logic 106, the client logic 102 creates connect logic for the connection, and sends a channel request message to the binding logic 104. The channel request message includes the calling address, the called address, a connect type indicating that a connection-oriented connection is requested, the connect logic identifier identifying the connect logic, and the X.25 channel identifier identifying the X.25 channel.

Upon receiving the channel request message from the client logic 102, the binding logic 104 binds the connect logic identified by the connect logic identifier and the X.25 channel identified by the X.25 channel identifier, and sends a startup message to the

-9-

connect logic including the X.25 channel identifier. The startup message confirms that the binding was successfully created.

Upon receiving the startup message from the binding logic 104, the connect logic updates its list of available communication channels to include the newly created X.25 channel.

Thereafter, when data is received over the X.25 channel, the data is forwarded to the connect logic, which in turn forwards the data to the client logic 102.

Similarly, when the client logic 102 needs to send data over the communication channel, the client logic 102 forwards the data to the connect logic. As part of its normal processing, the connect logic searches its list of available communication channels for a usable channel. Since there is only one communication channel for the connection-oriented client (i.e., the X.25 channel that was created by the X.25 logic 106), the connect logic forwards the data to the X.25 channel.

FIG. 4 shows the various event flows when a binding is initiated by the X.25 logic 106. For convenience, an event flow in which an entity is created is shown by a dashed arrow. An event flow involving a message exchange is shown by a solid arrow. The event sequence number is shown in parentheses.

When the X.25 logic 106 receives a call including a calling address and a called address, the X.25 logic 106 creates an X.25 channel 110 having an X.25 channel identifier in step (1). The X.25 logic 106 then sends a new channel message to the client logic 102 in step (2), and also sends a channel available message to the binding logic 104 in step (3). The new channel message includes the calling address, the called address, and the X.25 channel identifier. The channel available message includes the X.25 channel identifier, and also includes a connect logic identifier equal to zero to indicate that there is no connect logic associated with the X.25 channel.

Upon receiving the channel available message from the X.25 logic 106 in step (3), the binding logic 104 updates its binding database to include the newly created X.25 channel 110.

Upon receiving the new channel message from the X.25 logic 106 in step (2), the client logic 102 creates connect logic 108 for the connection in step (4), and sends a

-10-

channel request message to the binding logic 104 in step (5). The channel request message includes the calling address, the called address, a connect type indicating that a connection-oriented connection is requested, the connect logic identifier identifying the connect logic 108, and the X.25 channel identifier identifying the X.25 channel 110.

5 Upon receiving the channel request message from the client logic 102 in step (5), the binding logic 104 binds the connect logic 108 identified by the connect logic identifier and the X.25 channel 110 identified by the X.25 channel identifier, and sends a startup message to the connect logic 108 including the X.25 channel identifier in step (6). The startup message confirms that the binding was successfully created.

10 Upon receiving the startup message from the binding logic 104, the connect logic 108 updates its list of available communication channels to include the newly created X.25 channel 110.

15 After the connect logic 108 is bound to the X.25 channel 110, the client logic 102 sends an accept channel message to the X.25 logic in step (7). The accept channel message includes the X.25 channel identifier.

Thereafter, when data is received over the X.25 channel 110, the data is forwarded to the connect logic 108 in step (8), which in turn forwards the data to the client logic 102 in step (9).

20 Similarly, when the client logic 102 needs to send data over the communication channel, the client logic 102 forwards the data to the connect logic 108 in step (10). As part of its normal processing, the connect logic 108 searches its list of available communication channels for a usable channel. Since there is only one communication channel for the connection-oriented client (i.e., the X.25 channel that was created by the X.25 logic 106), the connect logic 108 forwards the data to the X.25 channel 110 in step 25 (11).

30 FIG. 5 is a logic flow diagram showing exemplary logic 500 for initiating a binding by the X.25 logic 106. Beginning at step 502, the client logic 102 registers with the X.25 logic 106 as a connection-oriented client available to be bound, in step 504. When the X.25 logic 106 receives a call including a calling address and a called address, in step 506, the X.25 logic 106 creates an X.25 channel having an X.25 channel identifier, in step 508.

-11-

The X.25 logic 106 then sends a new channel message to the client logic 102, in step 510, and also sends a channel available message to the binding logic 104, in step 512. The new channel message includes the calling address, the called address, and the X.25 channel identifier. The channel available message includes the X.25 channel identifier, and also includes a connect logic identifier equal to zero to indicate that there is no connect logic associated with the X.25 channel.

Upon receiving the channel available message from the X.25 logic 106, the binding logic 104 updates its binding database to include the newly created X.25 channel, in step 514.

Upon receiving the new channel message from the X.25 logic 106, the client logic 102 creates connect logic for the connection, in step 516, and sends a channel request message to the binding logic 104, in step 518. The channel request message includes the calling address, the called address, a connect type indicating that a connection-oriented connection is requested, the connect logic identifier identifying the connect logic, and the X.25 channel identifier identifying the X.25 channel.

Upon receiving the channel request message from the client logic 102, the binding logic 104 binds the connect logic identified by the connect logic identifier and the X.25 channel identified by the X.25 channel identifier, and sends a startup message to the connect logic including the X.25 channel identifier, in step 520. The startup message confirms that the binding was successfully created.

Upon receiving the startup message from the binding logic 104, the connect logic updates its list of available communication channels to include the newly created X.25 channel, in step 522. The client logic 102 then sends an accept channel message to the X.25 logic 106 including the X.25 channel identifier, in step 524. The logic 500 terminates in step 599.

## ERROR RECOVERY

During the normal course of operation, it is possible for either the client 102 or an X.25 channel to terminate. If a bound client terminates, then the binding logic 104

performs certain functions to “clean up” its associated X.25 logical channel. If a bound X.25 channel terminates, then the binding logic 104 notifies the client 102 that the communication channel is no longer available. In either case, the binding logic 104 unbinds the client 102 and its associated communication channel.

5

## ALTERNATIVE EMBODIMENTS

In the various embodiments described heretofore, a connection-oriented client was bound to an X.25 communication channel. However, the present invention is in no way limited to binding connection-oriented clients to X.25 communication channels.

An exemplary embodiment of the present invention utilizes binding logic to bind a connection-oriented client to a communication channel. The binding logic provides a common interface to the clients for all communication channels, and is therefore a convenient implementational element of an exemplary embodiment of the invention. However, the present invention does not require binding logic, as similar logic may be included in either the client logic or the driver logic. Thus, the present invention is in no way limited to using binding logic.

Similarly, an exemplary embodiment of the present invention utilizes connect logic to simplify the design of the client, and is therefore a convenient implementational element of an exemplary embodiment of the invention. However, the present invention does not require separate connect logic, as similar logic may be included in the client. Thus, the present invention is in no way limited to using connect logic.

In an exemplary embodiment of the present invention, predominantly all of the logic described herein is implemented as a set of computer program instructions that are stored in a computer readable medium and executed by an embedded microprocessor system within a network device. Various embodiments of the invention may be implemented in any conventional computer programming language. For example, an embodiment may be implemented in a procedural programming language (*e.g.*, “C”) or an object oriented programming language (*e.g.*, “C++”). Alternative embodiments of the invention may be implemented using discrete components, integrated circuitry,

10

15

20

25

30

programmable logic used in conjunction with a programmable logic device such as a Field Programmable Gate Array (FPGA) or microprocessor, or any other means including any combination thereof.

Alternative embodiments of the invention may be implemented as a computer program product for use with a computer system. Such implementation may include a series of computer instructions fixed either on a tangible medium, such as a computer readable media (*e.g.*, a diskette, CD-ROM, ROM, or fixed disk), or fixed in a computer data signal embodied in a carrier wave that is transmittable to a computer system via a modem or other interface device, such as a communications adapter connected to a network over a medium. The medium may be either a tangible medium (*e.g.*, optical or analog communications lines) or a medium implemented with wireless techniques (*e.g.*, microwave, infrared or other transmission techniques). The series of computer instructions embodies all or part of the functionality previously described herein with respect to the system. Those skilled in the art should appreciate that such computer instructions can be written in a number of programming languages for use with many computer architectures or operating systems. Furthermore, such instructions may be stored in any memory device, such as semiconductor, magnetic, optical or other memory devices, and may be transmitted using any communications technology, such as optical, infrared, microwave, or other transmission technologies. It is expected that such a computer program product may be distributed as a removable medium with accompanying printed or electronic documentation (*e.g.*, shrink wrapped software), preloaded with a computer system (*e.g.*, on system ROM or fixed disk), or distributed from a server or electronic bulletin board over the network (*e.g.*, the Internet or World Wide Web).

The present invention may be embodied in other specific forms without departing from the essence or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive.

I claim:

1. A method for binding a connection-oriented client to a communication channel, the method comprising:

5 creating a communication channel for the connection-oriented client, the communication channel having a channel identifier; and  
binding the communication channel to the connection-oriented client based upon the channel identifier.

- 10 2. The method of claim 1, wherein the communication channel is an X.25 logical channel, and wherein the channel identifier is an X.25 channel identifier.

- 15 3. The method of claim 2, wherein binding the communication channel to the connection-oriented client based upon the channel identifier comprises including the channel identifier in binding messages.

4. The method of claim 1, further comprising forwarding data by the connection-oriented client over the communication channel based upon the channel identifier.

- 20 5. The method of claim 1, further comprising forwarding data from the communication channel to the connection-oriented client based upon the channel identifier.

6. A network device comprising:  
connection-oriented client logic;  
binding logic; and  
driver logic, wherein the driver logic is operably coupled to create a  
5 communication channel for the connection-oriented client logic, the communication  
channel having a channel identifier, and wherein the binding logic is operably coupled to  
bind the connection-oriented client logic and the communication channel using the channel  
identifier.
- 10 7. The network device of claim 6, wherein the driver logic includes X.25 logic for  
creating an X.25 communication channel having an X.25 channel identifier, and wherein  
the binding logic binds the connection-oriented client and the X.25 communication  
channel using the X.25 channel identifier.

8. A program product comprising a computer readable medium having embodied therein a computer program for binding a connection-oriented client to a communication channel,

connection-oriented client logic;

5 binding logic; and

driver logic, wherein the driver logic is programmed to create a communication channel for the connection-oriented client logic, the communication channel having a channel identifier, and wherein the binding logic is programmed to bind the connection-oriented client logic and the communication channel using the channel identifier.

10 9. The program product of claim 8, wherein the driver logic includes X.25 logic for creating an X.25 communication channel having an X.25 channel identifier, and wherein the binding logic binds the connection-oriented client and the X.25 communication channel using the X.25 channel identifier.

10. A method comprising:
- requesting a channel by a connection-oriented client;
- creating the channel by a driver, the channel having a channel identifier; and
- binding the channel to the connection-oriented client based upon the channel  
identifier.

11. A method comprising:

registering to receive a call by a connection-oriented client;

receiving a call by a driver;

creating a channel by the driver, the channel having a channel identifier; and

5 binding the channel to the connection-oriented client based upon the channel

identifier.

12. A binding message for binding a connection-oriented client and a communication channel, the binding message comprising a channel identifier for the communication channel.

5 13. The binding message of claim 12, wherein the communication channel is an X.25 logical channel, and wherein the channel identifier is an X.25 channel identifier.

Approved for Release by NIST Special Database Manager

-20-

### **ABSTRACT OF THE DISCLOSURE**

Each connection-oriented client in a network device is bound to its own  
5 communication channel. The communication channel may be an X.25 logical channel  
having a single virtual circuit.

CONFIDENTIAL - THIS DOCUMENT CONTAINS TRADE SECRET INFORMATION OWNED BY BELL ATLANTIC CORPORATION. IT IS UNAUTHORIZED TO REPRODUCE, DISTRIBUTE OR DISCLOSE THIS DOCUMENT EXCEPT AS AUTHORIZED IN A WRITTEN AGREEMENT BETWEEN BELL ATLANTIC CORPORATION AND THE ADDRESSEE.

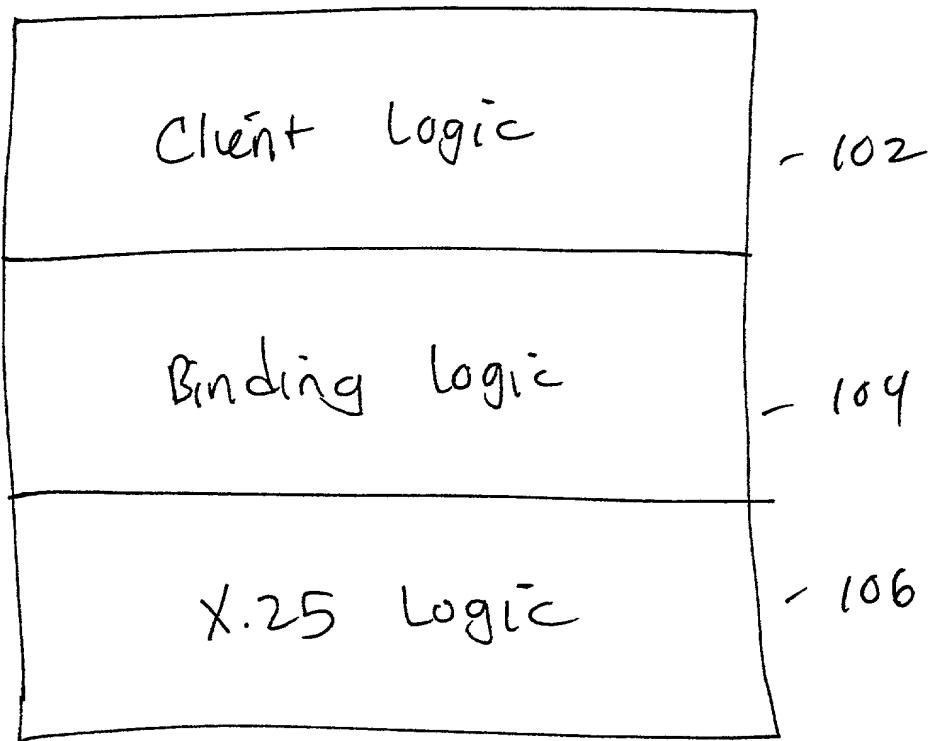


FIG. 1 100

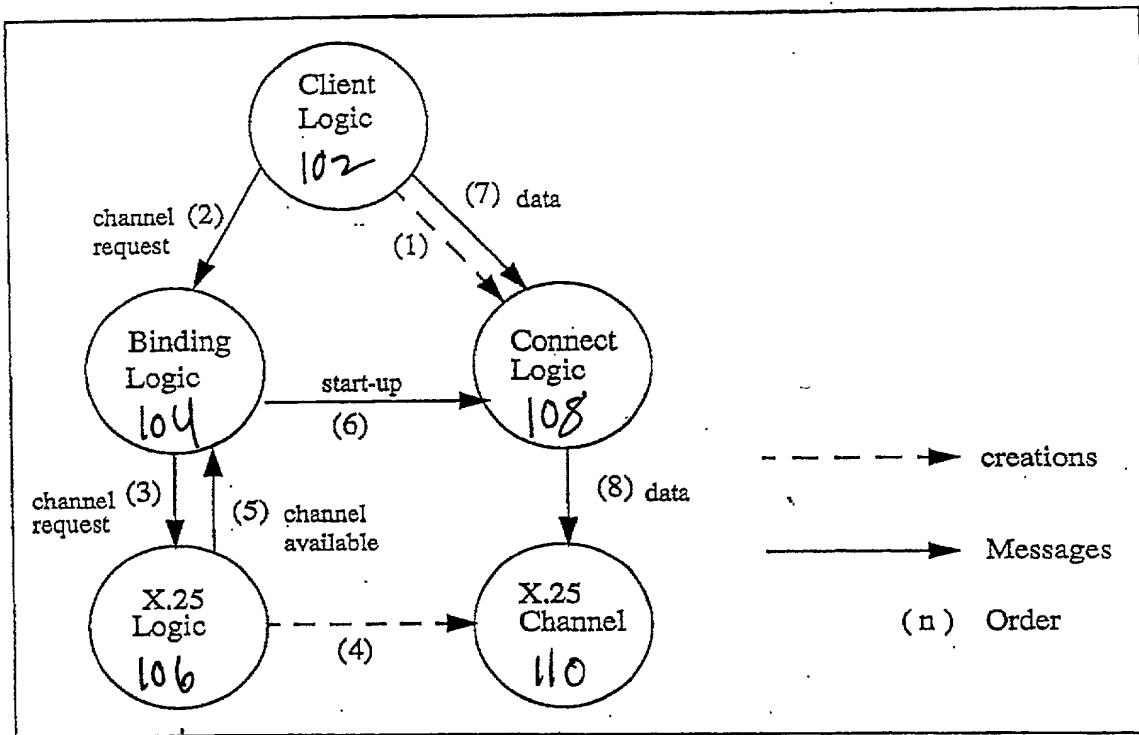


Fig. 2 200

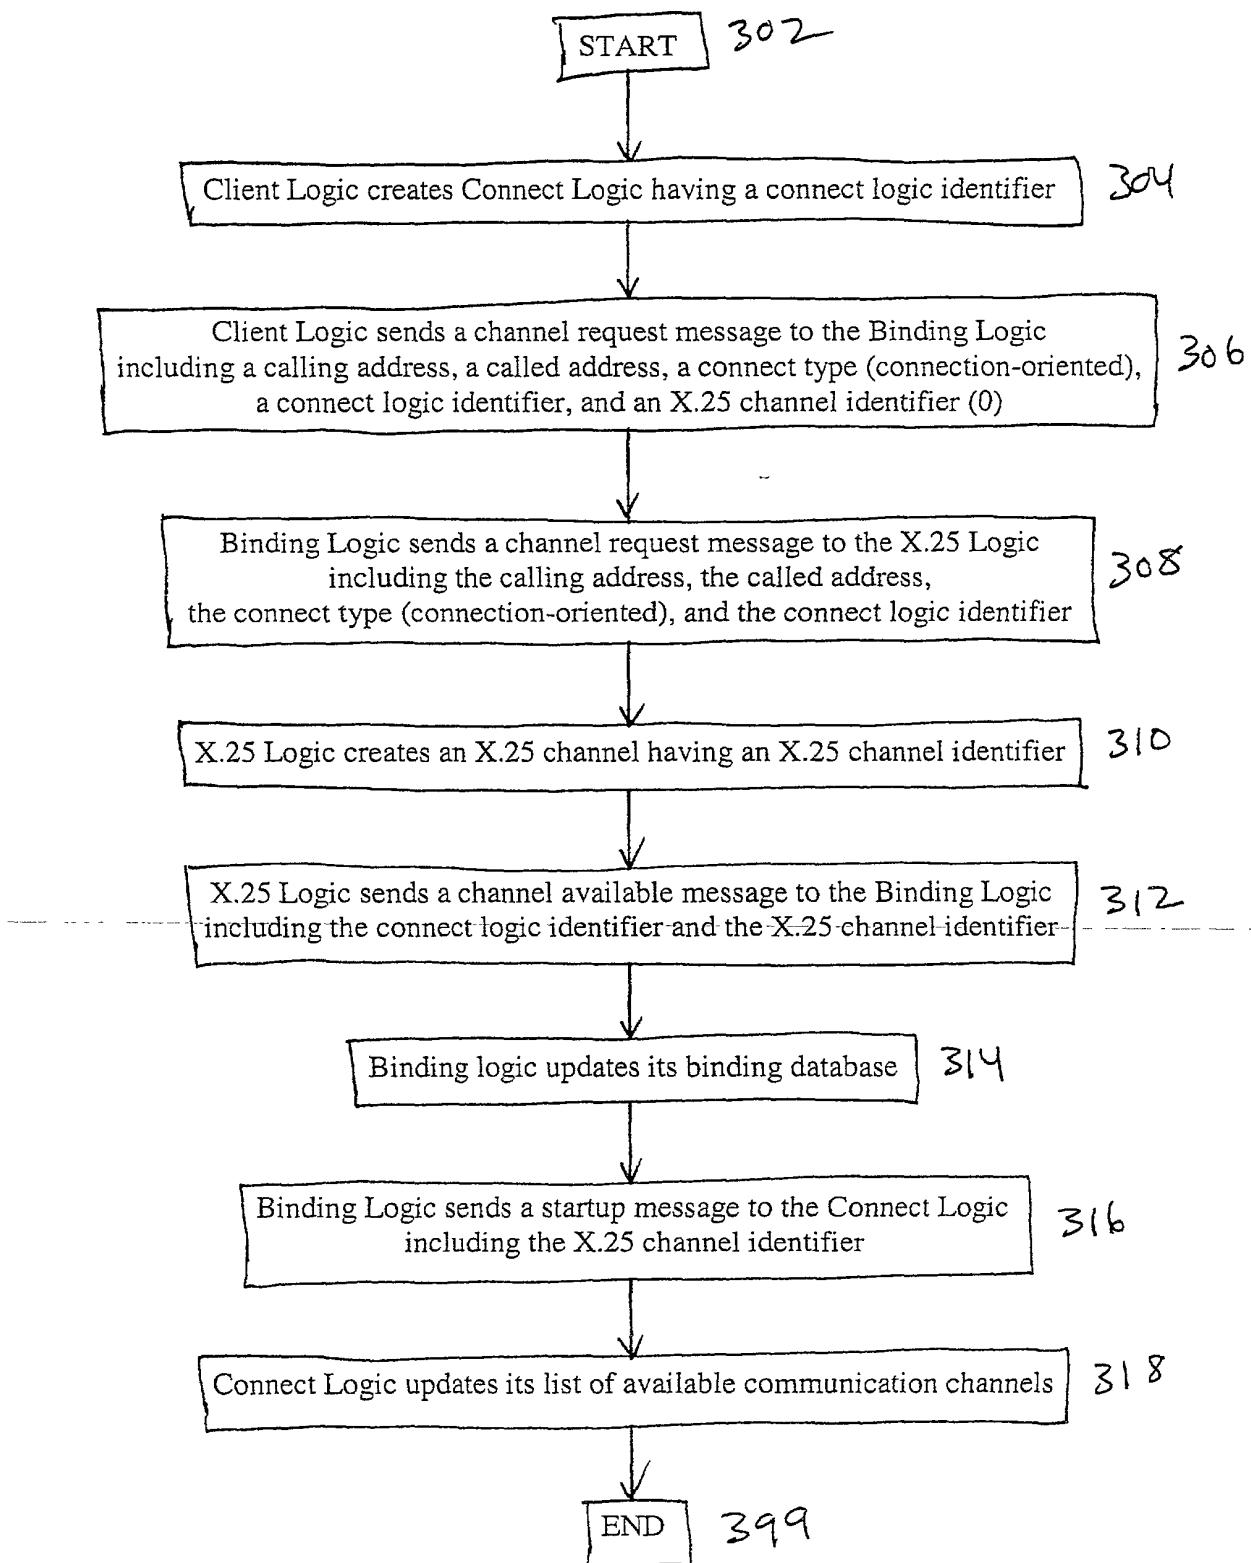


FIG. 3 300

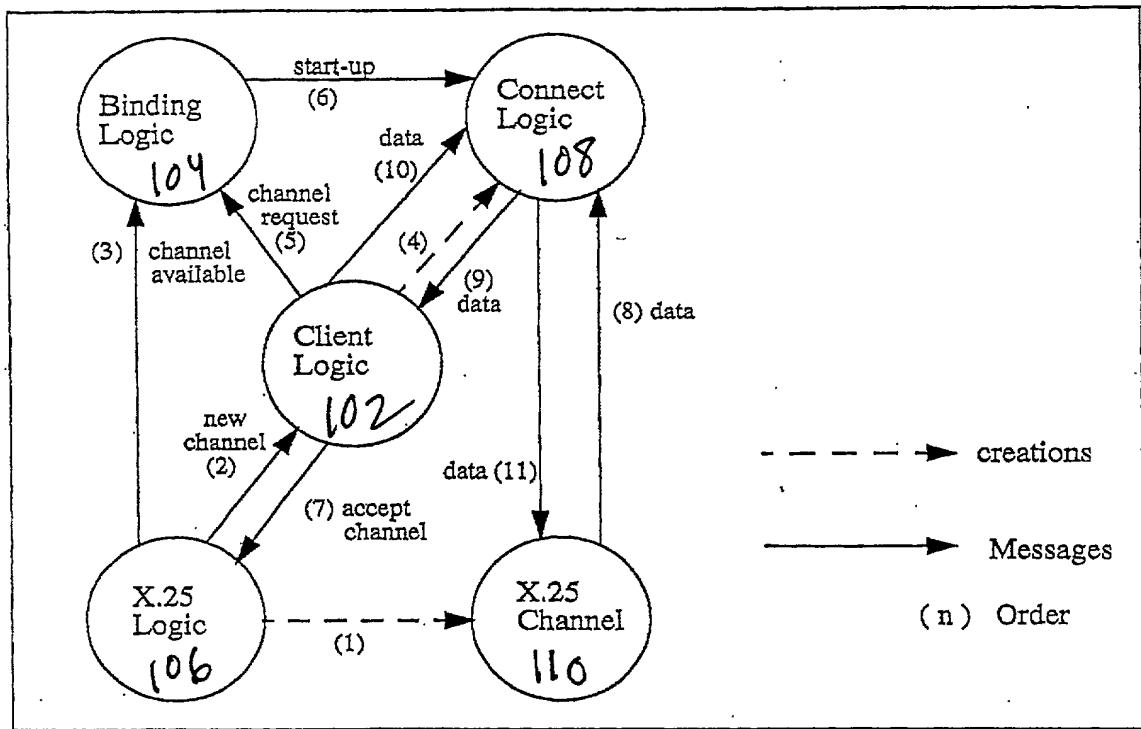


Fig. 4 400

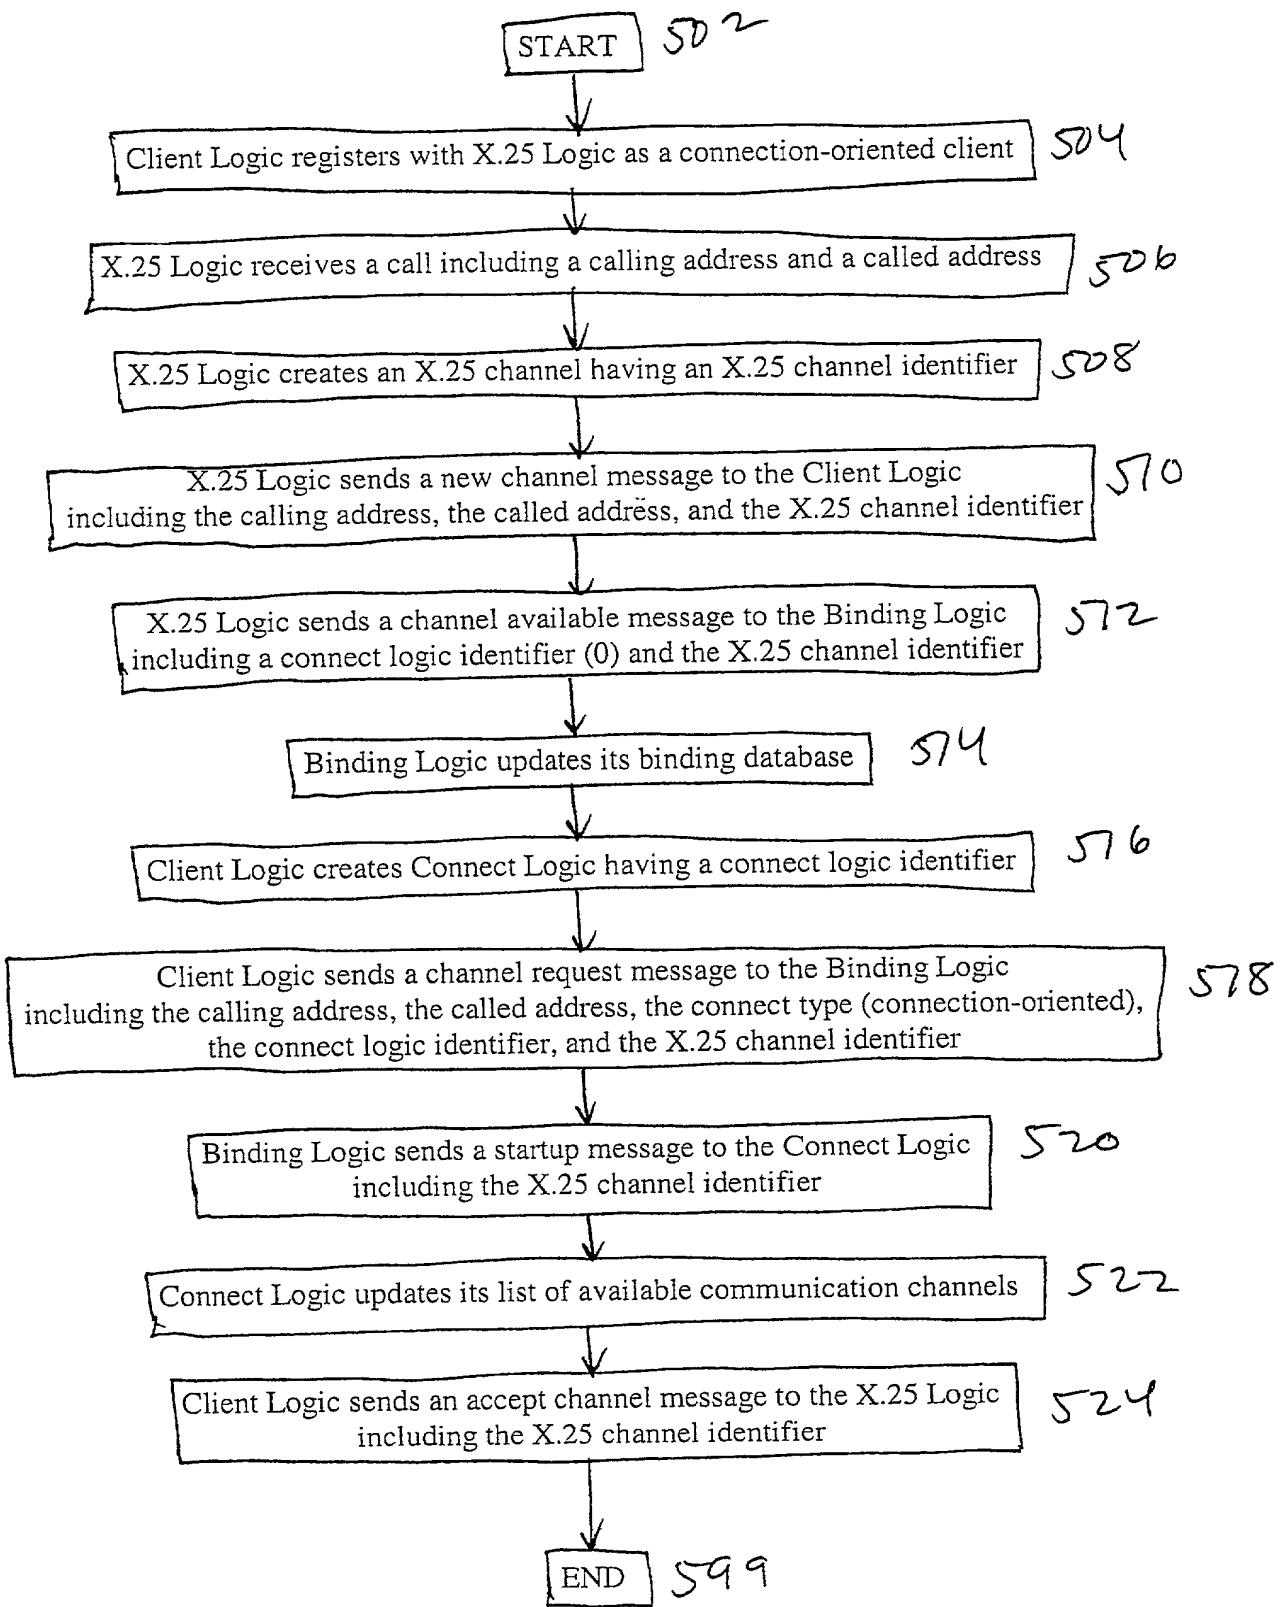


Fig. 5 500

Docket No.  
2204/A12

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

### APPARATUS AND METHOD FOR BINDING A CONNECTION-ORIENTED CLIENT TO A COMMUNICATION CHANNEL

the specification of which

(check one)

is attached hereto.

was filed on \_\_\_\_\_ as United States Application No. or PCT International Application Number \_\_\_\_\_  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

---

**60/121,661**

(Application Serial No.)

**February 25, 1999**

(Filing Date)

---

(Application Serial No.)

(Filing Date)

---

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

---

(Application Serial No.)

(Filing Date)

(Status)

(patented, pending, abandoned)

---

(Application Serial No.)

(Filing Date)

(Status)

(patented, pending, abandoned)

---

(Application Serial No.)

(Filing Date)

(Status)

(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (*list name and registration number*)

Bruce D. Sunstein	Reg. No. 27,234	Jay Sandvos	Reg. No. 43,900
Robert M. Asher	Reg. No. 30,445	Sonia K. Guterman	Reg. No. 44,729
Timothy M. Murphy	Reg. No. 33,198	Keith J. Wood	Reg. No. 45,235
Steven G. Saunders	Reg. No. 36,265	Mary M. Steubing	Reg. No. 37,946
Harriet M. Strimpel	Reg. No. 37,008	Christopher J. Cianciolo	Reg. No. 42,417
Samuel J. Petuchowski	Reg. No. 37,910	Lindsay J. McGuinness	Reg. No. 38,549
Jeffrey T. Klayman	Reg. No. 39,250		
John J. Stickevers	Reg. No. 39,387		
Herbert A. Newborn	Reg. No. 42,031		
Elizabeth P. Morano	Reg. No. 42,904		
Jean M. Tibbetts	Reg. No. 43,193		

Send Correspondence to: **Jeffrey T. Klayman**  
**Bromberg & Sunstein LLP**  
**125 Summer Street**  
**Boston, MA 02110**

Direct Telephone Calls to: (*name and telephone number*)  
**Jeffrey T. Klayman (617) 443-9292**

Full name of sole or first inventor <b>Richard Crump</b>	Date
Sole or first inventor's signature	
Residence <b>295 Beacon Street, Boston, MA 02117</b>	
Citizenship <b>U.S.</b>	
Post Office Address <b>same as residence</b>	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	